

CAIRNS

T: 07 4045 4388  
F: 07 4045 4399  
E: salescns@eesa.com.au



TOWNSVILLE

T: 07 4751 5800  
F: 07 4751 5811  
E: salestvl@eesa.com.au

**Mailing Address:**  
PO Box 404, Bungalow, QLD 4870


**Cairns Warehouse:**  
25 Supply Road, Bentley Park, QLD 4869

## INSTALLING ROOTGUARD

Rootguard effectively extends the foundations on which the building sits as complete enclosure eliminates any structural damage. Rootguard prevents moisture moving sideways through the soil and from under the building thus future foundation movement is eliminated.

### INSTALLATION GUIDELINES

1. Dig a trench about 75mm wide around the tree trunk and about 1 to 2 metres deep, a narrow trench means fewer refills required. If limited space is available, position Rootguard in a 2 metre radius around tree.
2. Rootguard should be inserted in trench with 50mm left above ground, to allow settlement.
3. Trim exposed tree roots and treat with fungicide if required.
4. Back fill the trench base then complete refill with spoil from the trench.
5. Rootguard can be trimmed down to just below lawnmower height but above ground level.

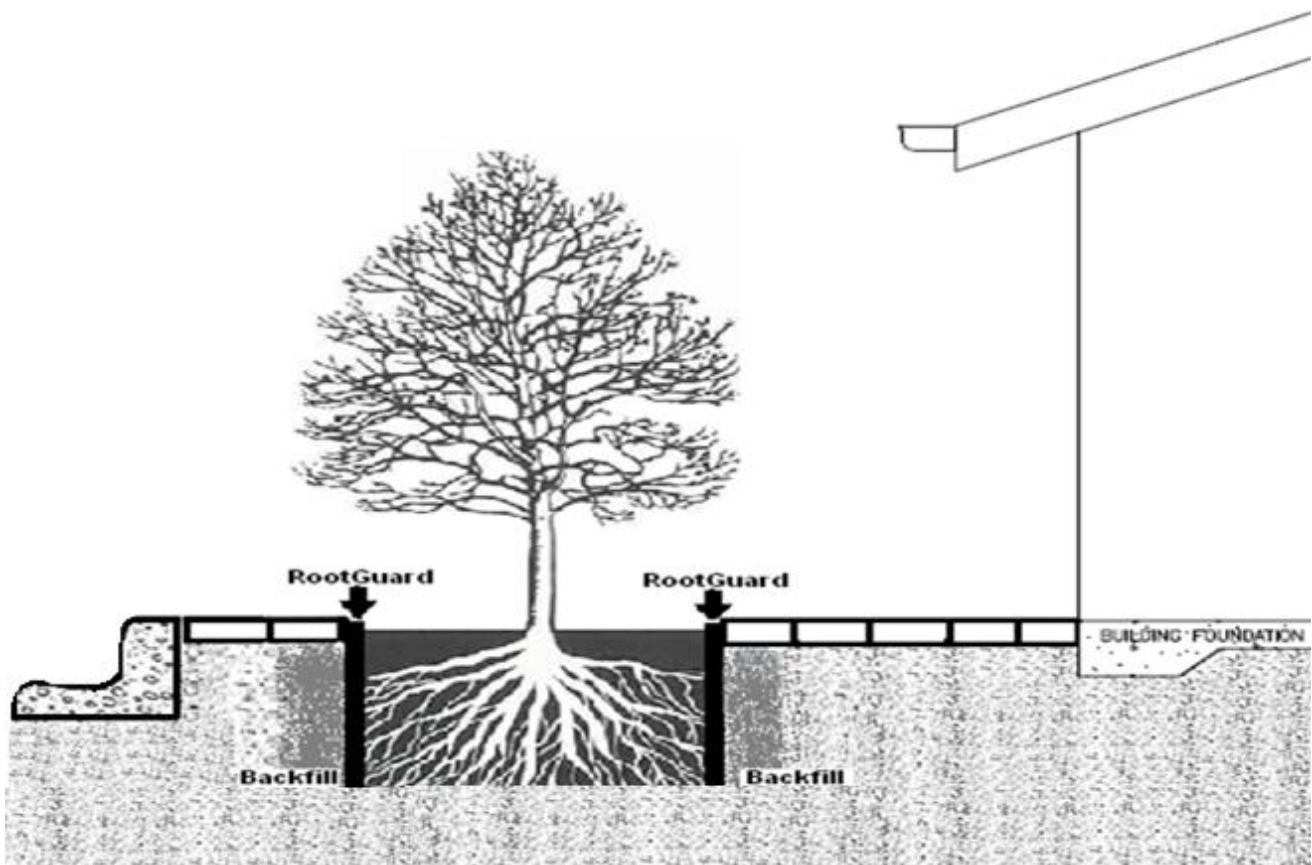

**Always remember that the closer you are to the tree trunk the higher the risk of damaging or destabilising the tree.** If it is necessary to cut closer to the trunk, it would be advisable to engage the services of an arborist to assess the tree prior to any work being carried out, and to help nurse the tree through the period of installation.