

Mailing Address:
PO Box 404
Bungalow QLD 4870

CAIRNS
T: (07) 4045 4388
F: (07) 4045 4399



CairnsTactiles

CAIRNS WAREHOUSE
25 Supply Rd
Bentley Park QLD 4869

TOWNSVILLE
T: (07) 4751 5800
F: (07) 4751 5811

E: projects@thegroundworkgroup.com.au

Trading Division of Groundwork Services Pty Ltd •

ABN: 44 072 354 833

E: salestvl@thegroundworkgroup.com.au

www.cairnstactiles.com.au

Stair Tread Nosing

Cairns Tactiles not only focus on TGSIs, but also specialise in the supply and installation of stair tread nosings, a must for anti-slip safety on all stairways.



Australian Building Standards require that all public access stairs must be fitted with a fully non-slip horizontal surface, measuring a minimum of 50mm wide and 25mm deep.

All stair nosings we install are qualified with Australian Standards, and also feature numerous other benefits. All Aluminium stair nosings are complete with a hard, anodised finish for durability. Nosings are available as plain aluminium featuring blunt extrusions, or come with a coloured insert of either PVC or carborundum, available in Safety Yellow, Black or with an assortment of colours in the PVC range. Stair Nosing featuring inserts are highly recommended for those areas that may be a challenge to meet the required luminance contrast standards, as they can aid visibility and highlight the edgings.

Photo luminescent inserts are a popular choice for many public buildings, featuring the ability to glow for up to 15 hours after a simple 15 minutes exposure to sunlight. Reinforced Fibreglass nosings are a must on mining sites and marine-based areas, having a high resistance to corrosion and consisting of a heavy grit for that extra non-slip safety.

Cairns Tactiles have installed Stair Nosing at Mt Sheridan Plaza and Tully High School Cyclone Shelter, Mt St Bernards in Herberton, and various smaller projects.



Give Cairns Tactiles a call today on (07)4045 4388 for a free quote on having effective, non-slip stair nosing added to your premises for a public safety guarantee!

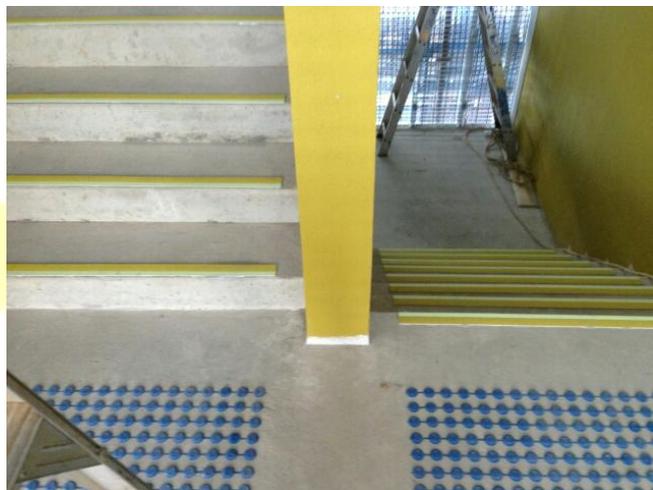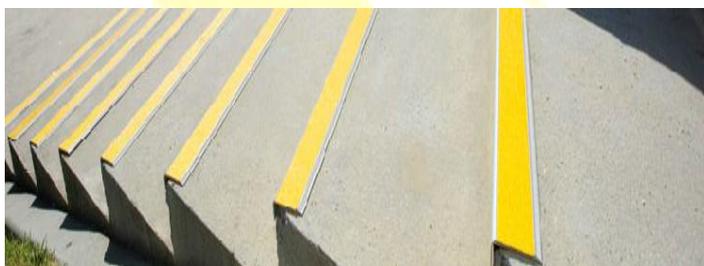



Fine Rippled Aluminium Nosing

Available in Natural, Anodised or Black
Made from 6063/T5 Alloy.
Holds a ribbed underside – glue-down only
65mm x 10mm

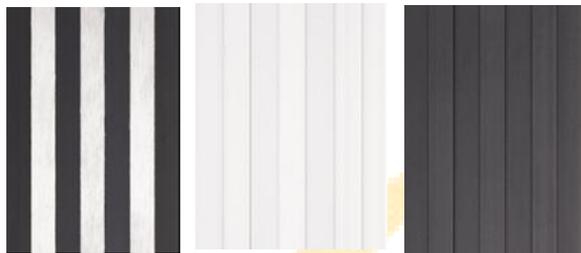
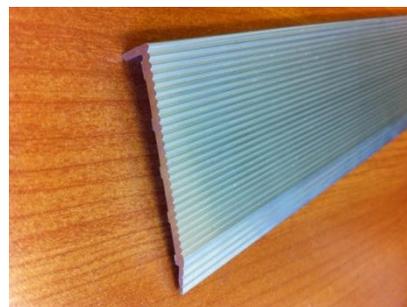


Pinstripe Stair Edging

Available in Natural, Black and or combination.
Hard Anodised Aluminium.
Intermittent blunt extrusions.
50mm x 50mm

ProStep Classic

Reinforced Aluminium, Square Faced Anodised Finish
Polymeric "Wrinkled" Insert
Available with Ivory, black yellow, grey and red Polymeric inserts.
Available as 50mm or 75mm depth

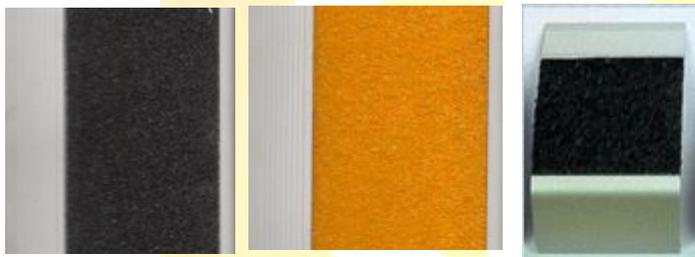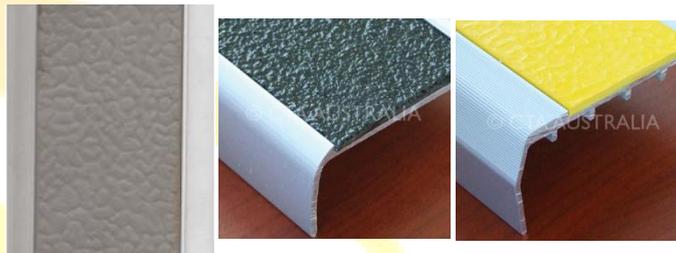


Carborundum Insert Aluminium Nosing

Available with Black or Yellow Insert Only
Anti-Slip Carborundum insert resistant to heavy detergents.
29mm x 73mm

Photo Luminescent Insert Anodised Aluminium

Available with either black carborundum or black PVC rippled insert.
Equivalent to Ecoglo Stair Nosing.
Glo will last up to 15 hours after 15 minutes exposure to sunlight.
29mm x 73mm

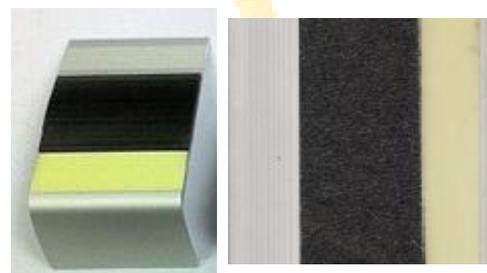


Reinforced Fibreglass

Available only in Safety Yellow
Heavy Grit Anti-Slip surface
Long-life, non-conductive, fire resistant, high corrosion resistance.
70mm x 25mm

Prostep 5 HiLight

Anodised aluminium, 5 "ribs" featuring carborundum inserts imbetween.
Aids in Luminance contrast.
Available in Black, Yellow, or combination.
50mm depth

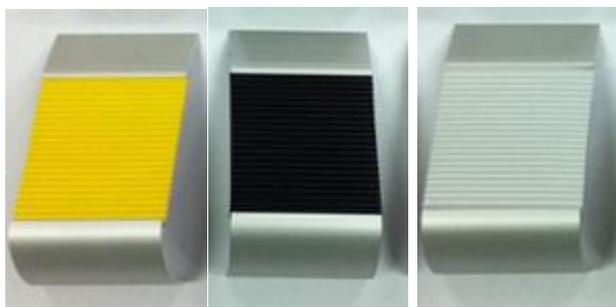

PVC Rippled Insert Anodised Aluminium Nosing

Available in Safety Yellow, Black, Pewter, Tan, Cherry Red, Blue, Dark Green, Terracotta, Light Green and Salmon.
29mm x 73mm